



Installation Instructions


Ridge Climber

GROUND SPACE


12' X 12'

COMMERCIAL PLAY SPACE

24' X 24'

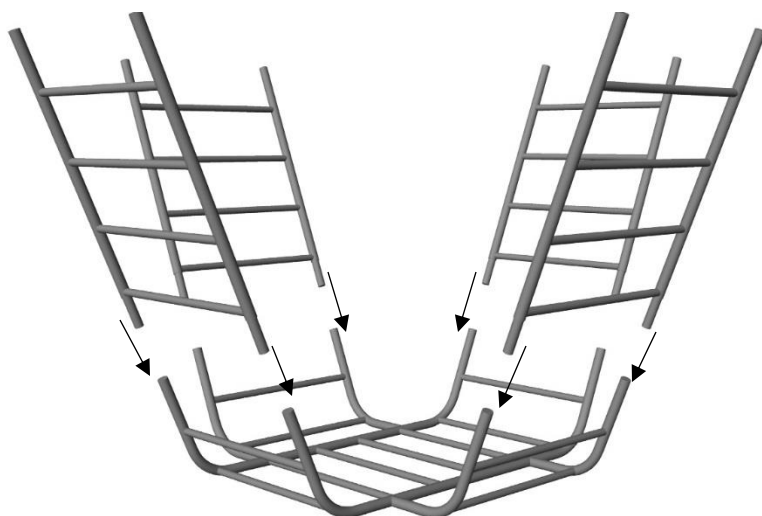

1. Place the Ridge Climber top upside down on the ground. Insert legs into sockets as seen in diagram #1.
2. Using 2 strong adults, roll the Climber right side up in desired location.
3. Determine location for holes and dig the Climber leg holes as seen in diagram #2.
4. Stand the Climber into the holes.
5. Level and plumb your Ridge Climber.
6. Pour Cement. Allow cement to cure for 3-5 days.

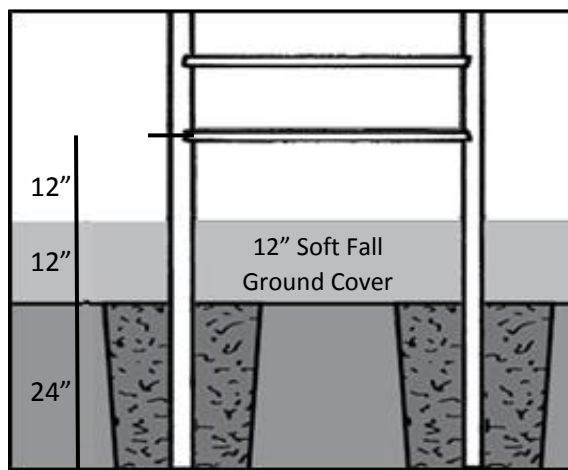

Hole 24" Deep x
18" Wide (Approx.
3 ½" 80 lb bags of
concrete mix per
hole)